



HIGHLIGHTS

- Projected capacitive multi-touch panel-PC
- Intel® Core™ i5-6500TE CPU
- Intel® HD graphics 530
- Full windows touch support with 10 touch points
- Anti-Glare display (1920x1080)

Figure shows configuration variant

polytouch® 24 One Piece

Overview

DISPLAY	Screen size	609.7 mm (24.0") (Anti-Glare)
	Resolution	1920x1080 (Full HD)
	Brightness	300 cd/m2
	Contrast	5000:1
TOUCH CONTROLLER	Touch technology	Projected Capacitive Touch (PCT)
	Simultaneous touches	10 touches
	Latency	≤ 15 ms
COMPUTER UNIT	Processor*	Intel® Core™ i5 6500TE Skylake 4C/4T 2.3 GHz 6 MB Smart Cache
	Graphics	Intel® HD graphics 530
	Memory*	8 GB DDR-4 RAM
	Storage*	mSATA SSD 256 GB
	LAN	2x 1GbE LAN
	OS compatibility	Windows 7 (32/64 Bit), Windows 8 (32/64 Bit), Windows 10 (32/64 Bit), Ubuntu Linux
	Speaker	Stereo Speaker
OPTIONAL COMPONENTS	Thermo-Printer	3"/80 mm
	Scanner/Imager	2D Barcode Scanner
	RFID/NFC	Various options available
	EFT Payment-ready	Various options available
	WLAN	300 Mbps WLAN 802.11 a/b/g/n
CHASSIS	Dimensions (WxDxH)	568x335x72.2 mm
	Weight	15 kg (without packaging and pedestal)
	Power Input	100–240 V AC C14
	Mounting	VESA MIS-E; wall-mount; built-in; pedestal


*other options available upon request

polytouch[®] 24 One Piece


Dimensions (in mm)

Figure shows configuration variant

polytouch[®] 24

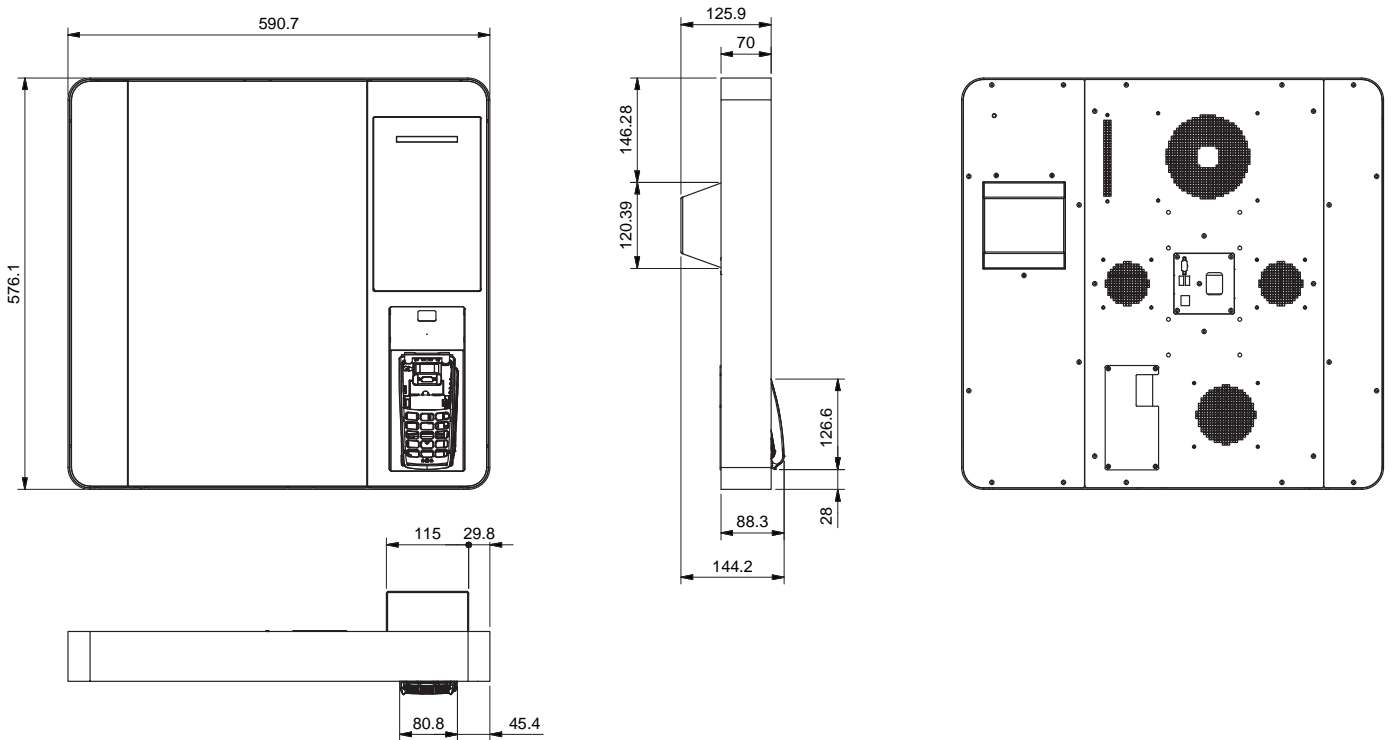

polytouch[®] 24 Large

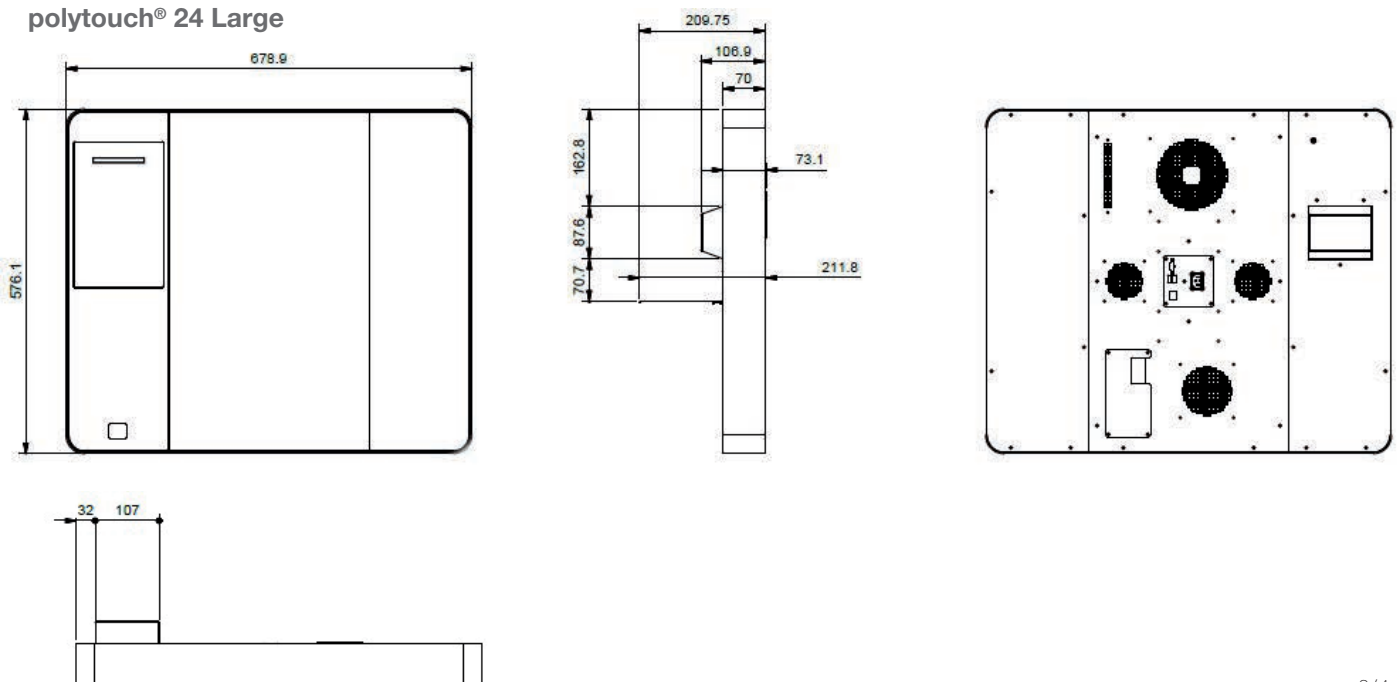



polytouch[®] 24 portrait with pedestal wave mini

polytouch[®] pedestal wave mini

Overview

PEDESTAL

Material	Steel, powder coated
Dimensions (WxDxH)	620x1052x434 mm
Weight	Approx. 40 kg (without packaging)
Mounting	Standalone
Optional	Shelves
Colour options	RAL 9010 Pure white RAL 9011 Graphite black more
Display angle	45°
Compatible with	polytouch [®] 24 portrait polytouch [®] 24 landscape polytouch [®] 32 landscape



Pedestal wave mini front view



Pedestal wave mini side view